



TECHNICAL DATA

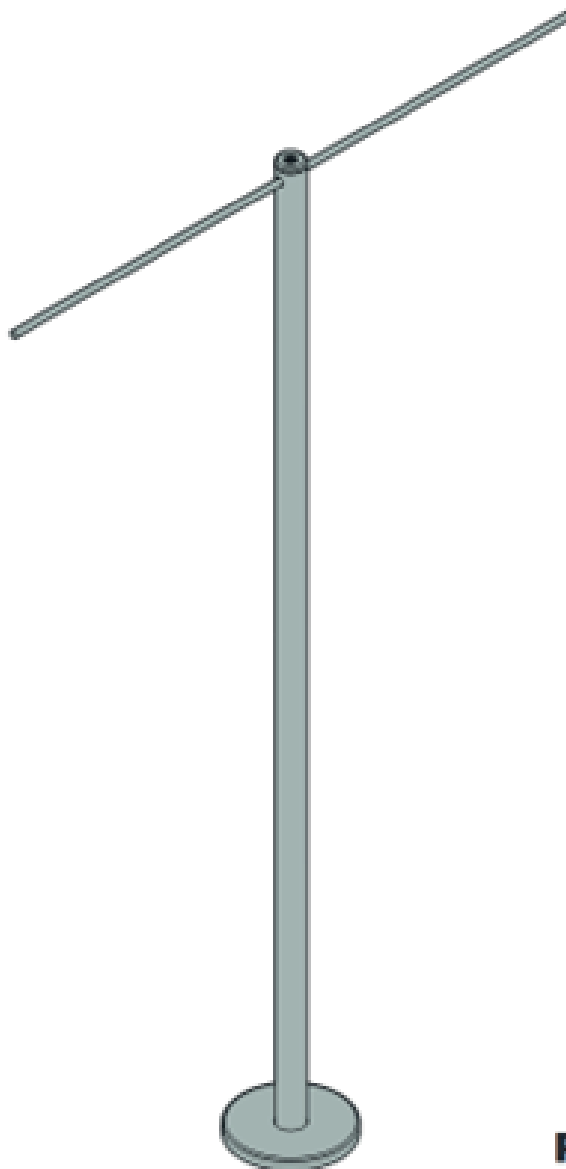

FIX

CONTAINED

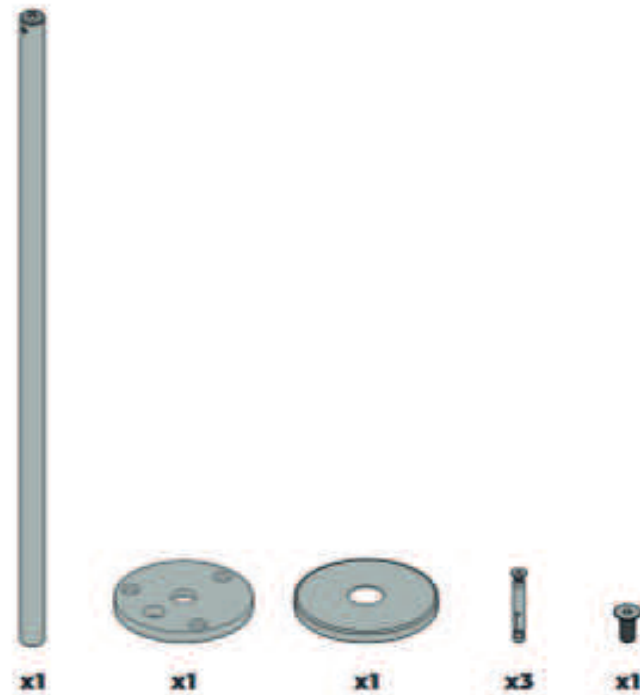


Note: It is strongly recommended to mark the screw locations with the post screwed to the plate to ensure that the straps at the top of the post are perfectly aligned.


When the posts are firmly attached, place the supplied finishing cover on top of the posts and slide it down to cover the base plate and hide the fasteners.

Installation instructions

1

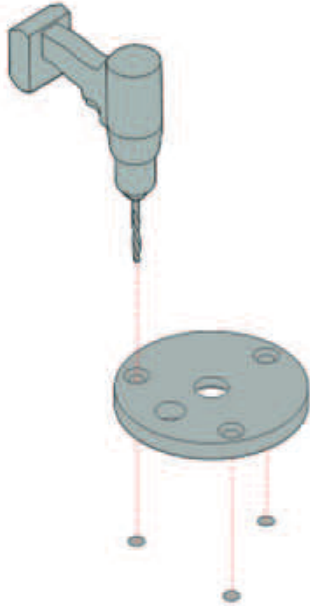


Mark the desired position of each post on the ground. (In the case of a 320cm strap, we recommend a distance of ± 250 cm between each post.)
Drill holes in the ground.

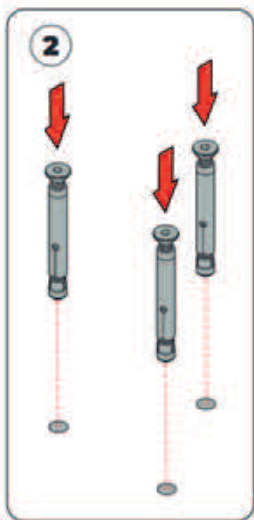

3




Push in the 3 floor screws and unscrew them to remove only the threaded rods

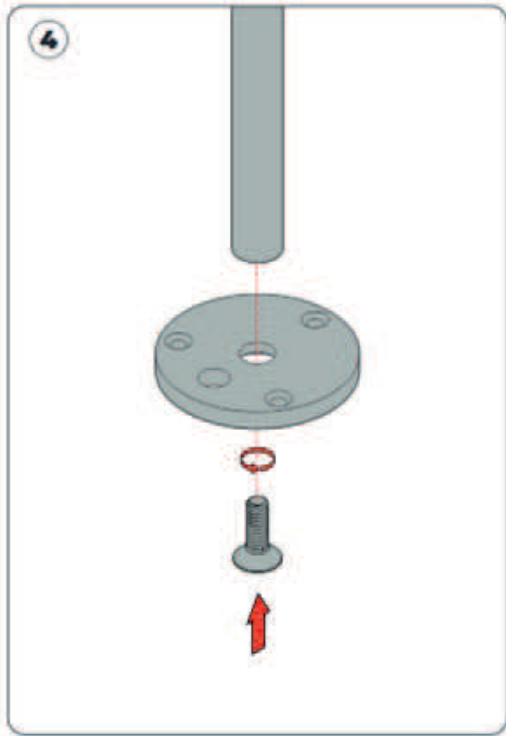

Screw the metal plate to the base of the post using the bolt supplied.

Screw on threaded rods

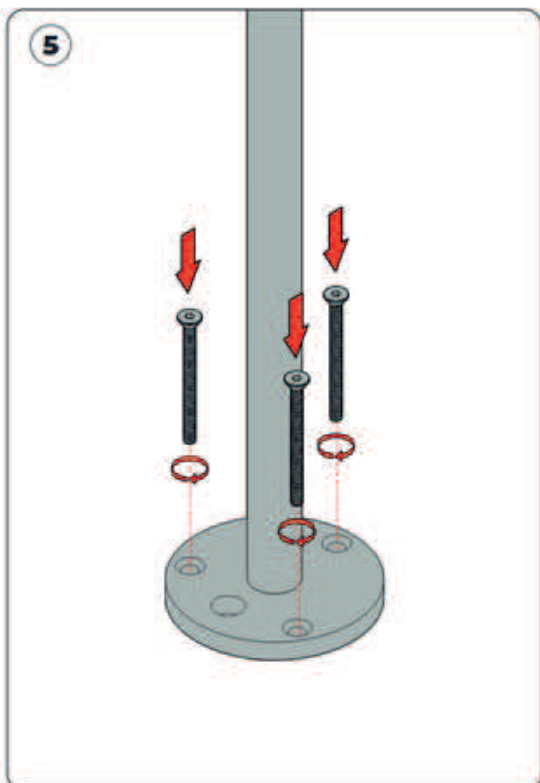

Placing the base

